

GATE-2011 Aerospace Engineering (AE)

Aerospace Engineering (AE)

Q. 1 – Q. 25 carry one mark each.

1. Consider x, y, z to be right-handed Cartesian coordinates. A vector function is defined in this coordinate system as $V = 3x\mathbf{i} + 3x\mathbf{j} + 3x\mathbf{k}$ where $\mathbf{i}, \mathbf{j}$ and $\mathbf{k}$ are the unit vectors along x, y and z axes, respectively. The curl of V is given by
 - a) $z^2\mathbf{i} - 3y\mathbf{k}$
 - b) $z^2\mathbf{j} + 3y\mathbf{k}$
 - c) $z^2\mathbf{i} + 3y\mathbf{k}$
 - d) $-z^2\mathbf{i} + 3y\mathbf{k}$
2. Which of the following functions is periodic?
 - a) $f(x) = x^2$
 - b) $f(x) = \log x$
 - c) $f(x) = e^x$
 - d) $f(x) = \text{constant}$
3. The function $f(x_1, x_2, x_3) = x_1^2 + x_1^2 + x_1^2 - 2x_1 - 4x_2 - 6x_3 + 14$ has its minimum value at
 - a) $\{1, 2, 3\}$
 - b) $\{0, 0, 0\}$
 - c) $\{3, 2, 1\}$
 - d) $\{1, 1, 3\}$
4. Consider the function $f(x_1, x_2) = x_1^2 + 2x_2^2 + e^{-x_1 - x_2}$. The vector pointing in the direction of maximum increase of the function at the point $\{1, -1\}$ is
 - a) $\begin{pmatrix} 2 \\ -2 \end{pmatrix}$
 - b) $\begin{pmatrix} 2 \\ 2 \end{pmatrix}$
 - c) $\begin{pmatrix} 2e^{-2} \\ 2e^{-2} \end{pmatrix}$
 - d) $\begin{pmatrix} 2 \\ 4 \end{pmatrix}$
5. Two simultaneous equations given by $y = \pi + x$ and $y = \pi - x$ have
 - a) a unique solution
 - b) infinitely many solutions
 - c) no solution
 - d) a finite number of multiple solutions
6. In three-dimensional linear elastic solids, the number of non-trivial stress-strain relations, strain-displacement equations and equations of equilibrium are, respectively.

- a) 3, 3 and 3
b) 6, 3 and 3
c) 6, 6 and 3
d) 6, 3 and 6
7. An Euler-Bernoulli beam in bending is assumed to satisfy
a) both plane stress as well as plane strain conditions
b) plane strain condition but not plane stress condition
c) plane stress condition but not plane strain condition
d) neither plane strain condition nor plane stress condition
8. A statically indeterminate frame structure has
a) same number of joint degrees of freedom as the number of equilibrium equations
b) number of joint degrees of freedom greater than the number of equilibrium equations
c) number of joint degrees of freedom less than the number of equilibrium equations
d) unknown number of joint degrees of freedom, which cannot be solved using laws of mechanics
9. Consider a single degree of freedom spring-mass-damper system with mass, damping and stiffness of m , c and k , respectively. The logarithmic decrement of this system can be calculated using
a) $\frac{2\pi c}{\sqrt{4mk - c^2}}$
b) $\frac{cc}{\sqrt{4mk - c^2}}$
c) $\frac{2\pi c}{\sqrt{mk - c^2}}$
d) $\frac{2\pi c}{\sqrt{mk - 4c^2}}$
10. Consider a single degree of freedom spring-mass system of spring stiffness k_1 and mass m which has a natural frequency of 10 rad/s. Consider another single degree of freedom spring-mass system of spring stiffness k_2 and mass m which has a natural frequency of 20 rad/s. The spring stiffness is k_2 is equal to
a) k_1
b) $2k_1$
c) $\frac{k_1}{4}$
d) $4k_1$
11. Consider a simply supported two-dimensional beam



if the beam is converted into a fixed-fixed beam as:



then the degree of static indeterminacy will

- a) increase by 3
 - b) increase by 2
 - c) decrease by 1
 - d) decrease by 3
12. An impulsive launch of a rocket minimizes the loss of burn-out velocity due to
- a) aerodynamic drag force only
 - b) gravitational force only
 - c) both aerodynamic drag and gravitational forces
 - d) reaction jet control force
13. Multi-staging in rockets improves the burn-out performance by increasing mainly stage-wise
- a) payload mass ratios
 - b) structural mass efficiencies
 - c) propellant masses
 - d) control system masses
14. In an un-powered glide of an aircraft having weight W , lift L and drag D , the equilibrium glide angle is defined as
- a) $\tan^{-1} \left(\frac{L}{D} \right)$
 - b) $\tan^{-1} \left(\frac{D}{L} \right)$
 - c) $\tan^{-1} \left(\frac{L}{W} \right)$
 - d) $\tan^{-1} \left(\frac{W}{L} \right)$
15. Lift on an aircraft climbing vertically up is
- a) equal to its weight
 - b) zero
 - c) equal to the drag
 - d) equal to the thrust
16. If an aircraft is performing a positive yawing maneuver, the side slip angle
- a) is always zero
 - b) is never zero
 - c) is always negative
 - d) could be any value

17. For an airplane to be statically stable, its centre of gravity must always be
- ahead of wing aerodynamic centre
 - aft of the wing aerodynamic centre
 - ahead of neutral point
 - aft of neutral point
18. It is seen that the drag polar of a certain aerofoll is symmetric about the C_{L_0} axis. This drag polar could refer to
- NACA 0012
 - NACA 4415
 - NACA 23012
 - None of the above
19. The aerodynamic centre of a supersonic aerofoil, with chord c , is located at
- the leading edge
 - $0.15c$
 - $0.5c$
 - $0.75c$
20. Winglets are used on wings to minimize
- skin friction drag
 - profile drag
 - wave drag
 - induced drag
21. Consider a potential flow with free stream velocity V_∞ over a spinning circular cylinder of radius R and circulation Γ . The stream function, ψ , where $\psi = 0$ on the cylinder surface, in cylindrical coordinates (r, θ) is given by
- $V_\infty r \cos \theta \left(1 - \frac{R^2}{r^2}\right) + \frac{\Gamma}{2\pi} \ln \frac{r}{R}$
 - $V_\infty r \cos \theta \left(1 + \frac{R^2}{r^2}\right) + \frac{\Gamma}{2\pi} \ln \frac{r}{R}$
 - $V_\infty r \sin \theta \left(1 - \frac{R^2}{r^2}\right) + \frac{\Gamma}{2\pi} \ln \frac{r}{R}$
 - $V_\infty r \sin \theta \left(1 + \frac{R^2}{r^2}\right) + \frac{\Gamma}{2\pi} \ln \frac{r}{R}$
22. A main objective of by-pass in a turbo-fan engine is to increase
- mass flow rate through engine inlet
 - turbine inlet temperature
 - mass flow rate through exhaust nozzle
 - compressor pressure ratio

23. The pressure ratio in any one stage of a jet engine compressor is limited by
- entry stagnation temperature in that stage
 - entry Mach number in that stage
 - pressure gradient induced separation in that stage
 - mass flow rate in that stage
24. Thermodynamic cycle on which the jet engine operates can be
- open Rankine cycle only
 - either open or closed Rankine cycle
 - open Brayton cycle only
 - either open or closed Brayton cycle
25. Propulsion efficiency of a jet engine is
- directly proportional to both the thrust power and the air mass flow rate
 - inversely proportional to both the thrust power and the air mass flow rate
 - directly proportional to the thrust power and inversely proportional to the air mass flow rate
 - inversely proportional to the thrust power and directly proportional to the air mass flow rate

Q. 26 to Q. 55 carry two marks each.

Questions Q.26 to Q. 36 are numerical answer type. The answer to each of these questions is either a positive whole number, or a positive real number with maximum of 2 decimal places.

26. Consider a cantilever beam having length $L = 1$ m, square cross-section (width = depth = 0.01 m) and young's modulus 50 GPa. The beam is subjected to a transverse load $P = 1$ N at the mid-span ($L/2$) at the center of the cross-section. Under the small deformation theory, the transverse deflection of the beam (in mm) at its free-end is _____.



27. Consider a beam in bending with a solid circular cross-section of 1 mm^2 , which is subjected to a transverse shear force of 1 N. The shear stress at the center of the cross-section (in N/mm^2) is _____.
28. A simply supported slender column of square cross section (width=depth= d) has to be designed such that it buckles at the same instant as it yields. Length of the column is given to be 1.57 m and it is made of a material whose young's modulus is 200 GPa and yield stress is 240 MPa. The width, d , of the column (in cm) should be _____.

29. A turbojet powered aircraft is flying at Mach number 0.8 at an altitude of 10 km. The inlet and exit areas of the engine are 0.7 m^2 and 0.4 m^2 respectively. The exhaust gases have velocity of 500 m/s and pressure of 60 kPa . The free stream pressure, density and speed of sound are 26.5 kPa , 0.413 kg/m^3 and 299.5 m/s respectively. The thrust of the engine (in kN) is _____.
30. A low-speed wind tunnel has a contraction ratio of 14:1 and the cross-sectional area of the test section is 1 m^2 . The static pressure difference between the settling chamber and the test section is 40 cm of water column. Assume $g = 9.81 \text{ m/s}^2$, $\rho_{\text{air}} = 1.2 \text{ kg/m}^3$ and $\rho_{\text{water}} = 1000 \text{ kg/m}^3$. The speed of air in the test section (in m/s) is _____.

Questions Q:31 to Q:55 are multiple choice type

31. Consider the function $f(x) = x - \sin x$. The Newton-Raphson iteration formula to find the root of the function starting from an initial guess $x^{(k)}$ at iteration k is

- a) $x^{(k+1)} = \frac{\sin x^{(k)} - x^{(k)} \cos x^{(k)}}{1 - \cos x^{(k)}}$
b) $x^{(k+1)} = \frac{\sin x^{(k)} + x^{(k)} \cos x^{(k)}}{1 - \cos x^{(k)}}$
c) $x^{(k+1)} = \frac{\sin x^{(k)} - x^{(k)} \cos x^{(k)}}{1 + \cos x^{(k)}}$
d) $x^{(k+1)} = \frac{\sin x^{(k)} + x^{(k)} \cos x^{(k)}}{1 + \cos x^{(k)}}$

32. Consider the matrix $\begin{bmatrix} a & b \\ b & a \end{bmatrix}$ where a and b are real numbers. The two eigenvalues of this matrix λ_1 and λ_2 are real and distinct ($\lambda_1 \neq \lambda_2$) when

- a) $a < 0$ and $b > 0$
b) $a > 0$ and $b < 0$
c) $a < 0$ and $b < 0$
d) $a = 0$ and $b = 0$

33. The solution of $\frac{dy}{dt} = y^2 e^t$ with initial condition $y(0) = 1$ is given by

- a) $\frac{1}{t} e^t (t+3)^2$
b) $\sqrt{\frac{t}{5+2e^t(t^2-2t+2)}}$
c) $\frac{te^t}{(t+2)^2}$
d) $\sqrt{\frac{t}{5-2e^t(t^2-2t+2)}}$

GATE Aerospace Academy

34. A jet engine is operating at a Mach number of 0.8 at an altitude of 10 km. The efficiency of the air intake is 0.8 and that of the compressor is 0.87. The total temperatures (in K) at the exits of the air intake and the compressor respectively are
(Ambient pressure = 26.5 kPa ; Ambient temperature = 223.3 K ; Gas constant, $\gamma = 1.4$; $P_{01} = P_{02}$)

- a) 251.9 and 458.2
- b) 234.9 and 466.3
- c) 251.9 and 456.3
- d) 234.9 and 458.2


35. A rocket engine is tested on a test bed under the ideal condition of fully expanded jet. The exhaust velocity is 2 km/s through a nozzle of area 2.5 m^2 . The mass flow rate is 200 kg/s. The specific impulse of the propellant and the thrust developed respectively are (assume $g = 9.81 \text{ m/s}^2$)

- a) 175.87 s and 200 kN
- b) 203.87 s and 400 kN
- c) 231.87 s and 200 kN
- d) 280.87 s and 400 kN

36. A body undergoes deformation under plane strain conditions when subjected to the following stresses (in MPa): $\sigma_{xx} = 450, \sigma_{yy} = 450, \tau_{xy} = 75, \tau_{yx} = 0, \tau_{xz} = 0$. What are the remaining components of stresses (in MPa) and strains? Assume the material to be isotropic and linear-elastic with Young's modulus $E = 200 \text{ GPa}$ and Poisson's ratio $\nu = 1/3$.

- a) $\sigma_{zz} = 0, \epsilon_{xx} = 0.00225, \epsilon_{yy} = 0.00225, \gamma_{xy} = 0.002, \gamma_{yz} = 0, \gamma_{zx} = 0$.
- b) $\sigma_{zz} = 300, \epsilon_{xx} = 0.001, \epsilon_{yy} = 0.001, \gamma_{xy} = 0.001, \gamma_{yz} = 0, \gamma_{zx} = 0$.
- c) $\sigma_{zz} = 300, \epsilon_{xx} = 0.00225, \epsilon_{yy} = 0.00225, \gamma_{xy} = 0.001, \gamma_{yz} = 0, \gamma_{zx} = 0$.
- d) $\sigma_{zz} = 0, \epsilon_{xx} = 0.001, \epsilon_{yy} = 0.001, \gamma_{xy} = 0.002, \gamma_{yz} = 0, \gamma_{zx} = 0$.

37. Which of the following Airy's stress functions could satisfy the given boundary conditions, assuming constant values of $\sigma_{xx} = P, \sigma_{yy} = Q, \tau_{xy} = R$, along the boundary?

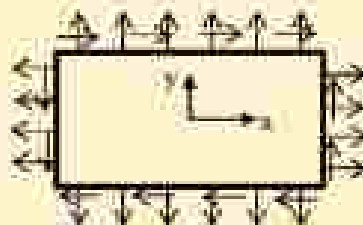

- a) $\phi = P \frac{x^2}{2} + Q \frac{y^2}{2} - Rxy$
- b) $\phi = P \frac{x^2}{2} + Q \frac{y^2}{2} + Rxy$
- c) $\phi = P \frac{x^2}{2} + Q \frac{y^2}{2} - Rxy$
- d) $\phi = P \frac{x^2}{2} + Q \frac{y^2}{2} + Rxy$

38. An aircraft is performing a coordinated turn manoeuvre at a bank angle of 30° and forward speed of 100 m/s. Assume $g = 9.81 \text{ m/s}^2$. The load factor and turn radius respectively are

- a) $\left(\frac{2}{\sqrt{3}}\right)$ and 1.76 km

- b) $\sqrt{3}$ and 17.6 km
c) 2 and 0.13 km
d) $\left(\frac{2}{\sqrt{3}}\right)$ and 17.6 km
39. An aircraft in a steady level flight at forward speed of 50 m/s suddenly rolls by 180° and becomes inverted. If no other changes are made to the configuration or controls of the aircraft, the nature of the subsequent flight path taken by the aircraft and its characteristic parameter(s) (assume $g = 9.81 \text{ m/s}^2$) are
- a) straight line path with a speed of 50 m/s
b) upward circular path with a speed of 50 m/s and radius of 127.4 m
c) downward circular path with a speed of 50 m/s and radius of 127.4 m/s
d) downward circular path with a speed of 25 m/s and radius of 254.8 m/s
40. An aircraft with a mass of 3000 kg takes off from sea level with a forward speed of 50 m/s and starts to climb with a climb angle of 15° . The rate of climb and excess thrust available at the start of the climb respectively (assume $g = 9.81 \text{ m/s}^2$) are
- a) 15.40 m/s and 13145.0 N
b) 12.94 m/s and 12694.1 N
c) 13.40 m/s and 12694.1 N
d) 12.94 m/s and 13145.0 N
41. A glider having a mass of 500 kg is taken to an altitude of 1000 m with a jeep moving on ground at 54 kmph. Upon reaching the required altitude in 50 s, the glider is released and starts its descent. Under the assumption of equilibrium glide, the range and endurance of the glider for a constant lift-to-drag ratio of 15 are
- a) 15.0 km and 1002.3 s respectively
b) 15.0 km and 601.3 s respectively
c) 1.0 km and 601.3 s respectively
d) 1.0 km and 50 s respectively
42. An elliptic orbit has its perigee at 400 km above the Earth's surface and apogee at 3400 km above the Earth's surface. For this orbit, the eccentricity and semi-major axis respectively are (assume radius of Earth = 6400 km)
- a) 0.18 and 8300 km
b) 0.18 and 1900 km
c) 0.12 and 8300 km
d) 0.12 and 1900 km

43. An aircraft in level flight encounters a vertical gust, which excites the phugoid mode. The phugoid motion completes 10 cycles in 30 s and its amplitude reduces to half of its maximum value in 25s. The eigenvalues of the phugoid mode are

a) $-0.05 \pm 0.02i$
b) $-0.5 \pm 0.2i$
c) $-0.028 \pm 1.26i$
d) $0.028 \pm 1.26i$

44. Consider the inviscid, adiabatic flow of air at free stream conditions, $M_\infty = 2$, $p_\infty = 1$ atm and $T_\infty = 288$ K around a sharp expansion corner ($\theta = 20^\circ$) as shown below. The Prandtl-Meyer function, v , is given as a function of Mach number, M , as $v(M) = \sqrt{\frac{\gamma+1}{\gamma-1}} \tan^{-1} \sqrt{\frac{\gamma-1}{\gamma+1} (M^2 - 1)} - \tan^{-1} \sqrt{M^2 - 1}$

Assume air to be calorically perfect with $\gamma = 1.4$. The Mach number, M_2 , downstream of the expansion corner is approximately



a) 2.00
b) 1.76
c) 2.83
d) 3.14

GATE Aerospace Academy

45. Consider a steady two dimensional zero-pressure gradient laminar flow of air over a flat plate as shown below. The free stream conditions are $U_\infty = 100 \frac{\text{m}}{\text{s}}$, $\rho_\infty = 1.2 \text{ kg/m}^3$, $p_\infty = 1$ atm and $\mu_\infty = 1.8 \times 10^{-4} \frac{\text{kg}}{\text{m.s}}$

The ratio of displacement thickness to momentum thickness of the boundary layer at a distance of 2 m from the leading edge is



a) 7.53
b) 3.59
c) 2.81
d) 0.58

46. In the context of Prandtl's lifting line theory for a finite wing, which of the following combinations of statements is TRUE?

P: The bound vortex is responsible for the lift force

- Q: The trailing vortices are responsible for the induced drag
 R: The bound vortex is responsible for the induced drag
 S: The trailing vortices are responsible for the lift force

- a) P,Q
 b) Q,R
 c) R,S
 d) P,S

47. Consider flow over a thin aerofoil at Mach number, $M_\infty = 0.5$ at an angle of attack, α . Using the Prandtl-Glauert rule for compressibility correction, the formula for lift coefficient, c_l , can be written as

- a) 5.44α
 b) 6.16α
 c) 7.16α
 d) 14.52α

Common Data for Questions

Common Data for Questions 48 and 49

The partial differential equation (PDE) governing free vibrations of a uniform Euler-Bernoulli beam $EI \frac{\partial^4 w}{\partial x^4} + m \frac{\partial^2 w}{\partial t^2} = 0$, is where EI is the flexural stiffness, m is the mass per unit length, $w(x, t)$ is the bending displacement, x is the coordinate along the beam length, t is time and L is the beam length



48. To solve the PDE, the number of boundary conditions (BC) and initial conditions (IC) needed are

- a) 4 BC, 3 IC
 b) 2 BC, 2 IC
 c) 2 BC, 4 IC
 d) 4 BC, 2 IC

49. For the cantilever beam shown in the figure, which of the following CANNOT be a possible boundary condition?

- a) $w(0, t) = 0$
 b) $\frac{\partial^3 w}{\partial x^3}(L, t) = 0$
 c) $\frac{\partial^2 w}{\partial x^2}(0, t) = 0$

d) $\frac{\partial^2 \psi}{\partial x^2} (L, t) = 0$

Common Data for Questions 50 and 51:

Consider an inviscid, adiabatic flow of air at free stream Mach Number, $M_\infty = 2$, across a compression corner ($\theta = 20^\circ$) as shown. The free stream total enthalpy is $h_{0,\infty} = 810 \text{ kJ kg}^{-1}$. Assume that air is calorically perfect with $\gamma = 1.4$, $R = 287 \text{ J kg}^{-1} \text{ K}^{-1}$.



50. The shock angle β is

- a) $= 20^\circ$
- b) $> 20^\circ$ and $< 30^\circ$
- c) $= 30^\circ$
- d) $> 30^\circ$

GATE Aerospace Academy

51. The total temperature at point P is:

- a) 806.37 K
- b) 1128.93 K
- c) 1612.74 K
- d) 2257.84 K

Linked Answer Questions

Statement for Linked Answer Questions 52 and 53:

A thin-walled (thickness $\ll$ radius), hollow shaft of length 1m and mean radius, $R = 5 \text{ cm}$ has to be designed such that it can transmit a torque, $T = 7 \text{ kN-m}$. A survey of different commercially available materials was made and following data was obtained from the suppliers (E : Young's modulus, τ_y : yield stress in shear, ρ : density)

Material	E (GPa)	τ_y (MPa)	ρ (kg/m^3)
X	200	580	7700
Y	70	225	2700
Z	110	375	4875

52. Which of the above materials would you choose such that weight of the shaft is minimum?

- a) X only
- b) Y only
- c) Z only

d) X OR Y

53. If you assume a factor of safety of 2, what should be the approximate thickness of such a shaft?

- a) 0.5 mm
- b) 1 mm
- c) 2 mm
- d) 4 mm

Statement for Linked Answer Questions 54 and 55:

Prandtl's lifting line equation for a general wing is given by

$\alpha(y_0) = \frac{\Gamma(y_0)}{\pi U_\infty c(y_0)} + \alpha_{i=0}(y_0) + \frac{1}{4\pi U_\infty} \int_{-b}^b \frac{\Gamma(y)}{y_0 - y} dy$, where U_∞ is the free-stream velocity, α is the angle of attack, y_0 is the spanwise location, $\alpha_{i=0}(y_0)$, gives the spanwise variation of zero-lift angle, c is the chord, b is the span, and $\Gamma(y_0)$ gives the spanwise variation of circulation.

54. The rate of change of circulation with angle of attack $\Gamma_\alpha = \frac{d\Gamma}{d\alpha}$ is

- a) inversely proportional to α
- b) independent of α
- c) a linear function of α
- d) a quadratic function of α

55. Given that $C_L \propto \int_{-b}^b \Gamma(y) dy$, the corresponding lift curve-slope $\frac{dC_L}{d\alpha}$ is

- a) independent of α
- b) a linear function of α
- c) a quadratic function of α
- d) a cubic function of α

General Aptitude (GA) Questions

Q. 56 – Q. 60 carry one mark each.

56. Choose the word from the options given below that is most nearly opposite in meaning to the given word.

Deference

- a) aversion
- b) resignation
- c) suspicion
- d) contempt

57. Choose the most appropriate word(s) from the options given below to complete the following

We lost confidence in him because he never _____ the grandiose promises he had made.

- a) delivered
- b) delivered on
- c) forgot
- d) reneged on

58. Choose the word or phrase that best completes the sentence below.

_____ in the frozen wastes of Arctic takes special equipment.

- a) To survive
- b) Surviving
- c) Survival
- d) That survival

59. In how many ways 3 scholarships can be awarded to 4 applicants, when each applicant can receive any number of scholarships?

- a) 4
- b) 12
- c) 64
- d) 81

60. Choose the most appropriate word from the options given below to complete the following sentence.

The _____ of evidence was on the side of the plaintiff since all but one witness testified that his story was correct.

- a) paucity
- b) propensity
- c) preponderance
- d) accuracy

Q. 61 to Q. 65 carry two marks each.

61. If $(2y + 1)/(y + 2) < 1$, then which of the following alternatives gives the CORRECT range of y ?

- a) $-2 < y < 1$
- b) $-2 < y < 1$
- c) $-3 < y < 1$
- d) $-4 < y < 1$

62. A student attempted to solve a quadratic equation in x twice. However, in the first attempt, he incorrectly wrote the constant term and ended up with the roots as (4, 3). In the second attempt, he incorrectly wrote down the coefficient of x and got the roots as (3, 2). Based on the above information, the roots of the correct quadratic equation are


- a) (-3, 4)

- b) (3, -4)
- c) (6, 1)
- d) (4, 2)

63. L, M and N are waiting in a queue meant for children to enter the zoo. There are 3 children between L and M, and 8 children between M and N. If there are 3 children ahead of N and 21 children behind L, then what is the minimum number of children in the queue?

- a) 28
- b) 37
- c) 41
- d) 46

64. Four archers P, Q, R and S try to hit a bull's eye during a tournament consisting of seven rounds. As illustrated in the figure below, a player receives 10 points for hitting the bull's eye, 5 points for hitting within the inner circle and 1 point for hitting within the outer circle.



The final scores received by the players during the tournament are listed in the table below. the most accurate and the most consistent players during the tournament are respectively

Round	P	Q	R	S
1	1	5	1	10
2	5	10	10	1
3	1	1	1	5
4	10	10	1	1
5	1	5	5	10
6	10	5	1	1
7	5	10	1	1

- a) P and S
- b) Q and R
- c) Q and S
- d) R and Q

65. Nimbus clouds are dark and ragged, stratus clouds appear dull in color and cover the entire sky. Cirrus clouds are thin and delicate, whereas cumulus clouds look like cotton balls. It can be inferred from the passage that:

- a) A cumulus cloud on the ground is called fog
- b) It is easy to predict the weather by studying clouds
- c) Clouds are generally of very different shapes, sizes and mass
- d) There are four basic cloud types: stratus, nimbus, cumulus and cirrus

Download our App

Download application for free Test, Assignments, enquiries and other benefits.
For Android, type Gate Aerospace Academy in google play store and get it.

<https://play.google.com/store/apps/details?id=co.lynde.lyde>

For iOS contact personally

(9000373757,8368433511)



GATE Aerospace 2021 Toppers



Britam Nath
All India Rank **(2)**



Amit Vashistha
All India Rank **(6)**

25	36	42	62	66	81	96	98	98	109
116	134	140	148	162	173	189	226	258	326
339390404486626									

HEARTY CONGRATULATIONS TO OUR STUDENTS FOR THEIR EXCEPTIONAL PERFORMANCE IN
GATE AEROSPACE 2021

GATE AEROSPACE ACADEMY
Dedicated to Excellence

HEARTY CONGRATULATIONS TO OUR STUDENTS FOR THEIR EXCEPTIONAL PERFORMANCE IN

GATE AEROSPACE 2020



03



04



10



31





34



40



49



51



62



74



Gate AeroSpace 2019 Results

32	31	30	31	25	11
45	190	128	138	181	155
108	178	108	200	242	
		265	247	200	

Hearty congratulations to our Classroom Program student from
Pimpri Institute of Technology and Innovation for his
extraordinary performance in
GATE AeroSpace 2019

AIR-13
PRATIKHAT KHATRI

www.gateaerospaceacademy.com

Hearty congratulations to our Classroom Program students from
Rajasthan Technical University Kota for their extraordinary
performance in GATE AeroSpace 2019

AIR-10 **AIR-39** **AIR-59** **AIR-98**
PRAKASH KISHORE HARSH VARDHAN AKSHAY KUMAR ANSHU SINGH

www.gateaerospaceacademy.com

Hearty congratulations to our Classroom Program students
for their extraordinary performance in
GATE AeroSpace 2019

AIR-42 **AIR-35** **AIR-47**
AKSHAY KUMAR AKSHITA SINGH AKSHAY KUMAR

www.gateaerospaceacademy.com

Hearty congratulations to our Classroom Program
students from Institute of Aeronautical Engineering
College for their extraordinary performance in
GATE AeroSpace 2019

AIR-39 **AIR-43** **AIR-152**
AKSHAY KUMAR AKSHITA SINGH AKSHAY KUMAR

www.gateaerospaceacademy.com

Hearty congratulations to our Classroom Program students
for their extraordinary performance in
GATE AeroSpace 2019

AIR-53 **AIR-49** **AIR-59**
AKSHAY KUMAR AKSHITA SINGH AKSHAY KUMAR

www.gateaerospaceacademy.com

HEARTY
CONGRATULATIONS TO
OUR STUDENT
K. SWARNASHEE FOR
SELECTING AS A JUNIOR
RESEARCH FELLOWSHIP
AT DRDO

K. Swarnashee

www.gateaerospaceacademy.com

Our gallery







Our Books

